



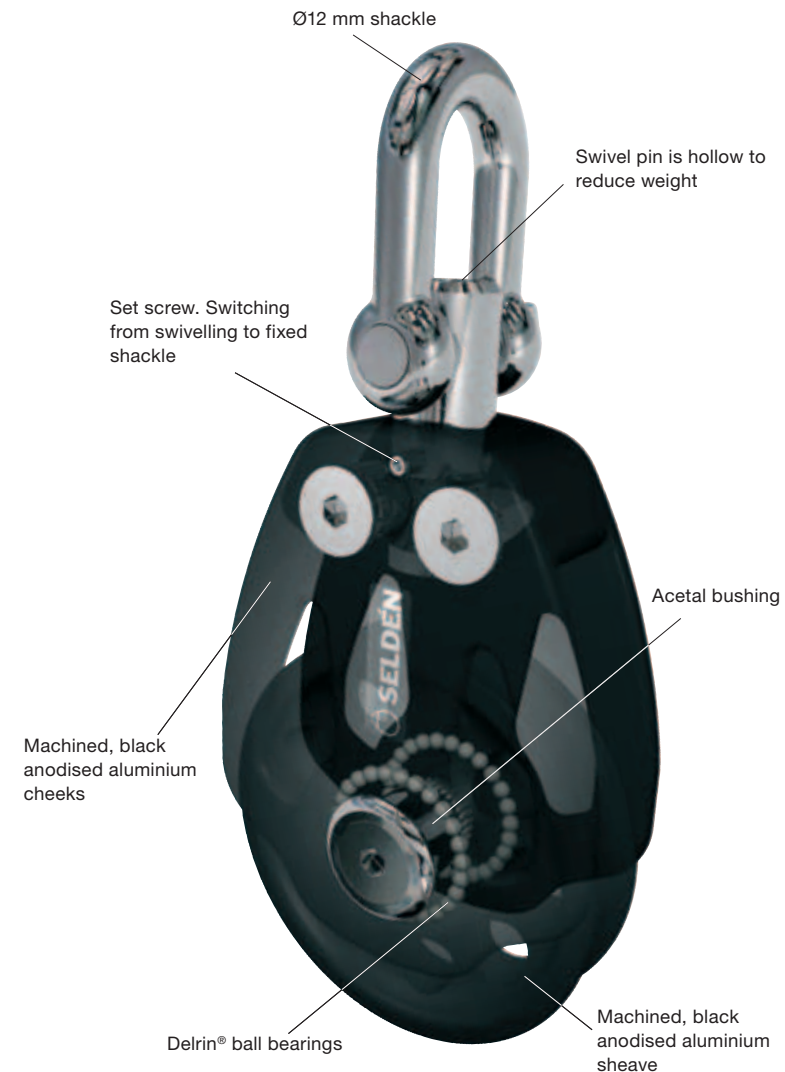

# PLAIN BEARING BLOCK 100

## TECHNICAL FEATURES PBB 100

- A plain bearing block handling up to 4 ton load.
- The block features a plain bearing with acetal bushing and two axial Delrin® bearings. These stabilize the sheave when the rope enters or exits the block with an angle.
- Machined, black anodised aluminium sheave and cheeks.
- The swivel pin is hollow and chamfered to reduce weight and all stainless parts are insulated from aluminium to prevent corrosion.
- The blocks are quick and easy to dismantle for maintenance.

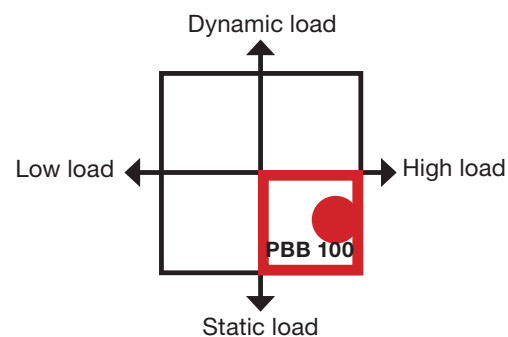

## APPLICATIONS

- Outhaul arrangements
- Sheets
- Halyards
- Backstay
- Runners

1



Single

2



Single swivel becket

3



Single halyard

4



Double



PBB 100 Cheek

5




Cheek

6



Double cheek

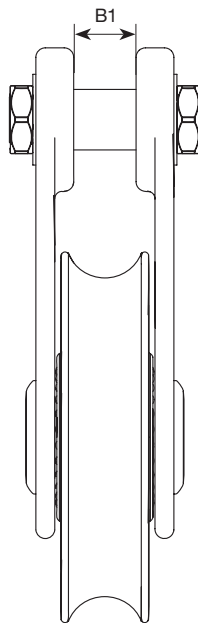

### PBB 100

	Art. No.	Weight (g)	Width <sup>B1</sup> (mm)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle (Ø mm)
1	410-001-01R	1030	-	4000	8000	20	12
2	410-001-02R	1100	-	4000	8000	20	12
3	410-001-03R	633	16.5	4000	8000	20	16 mm pin
4	410-001-04R	1750	-	4000	8000	20	12
5	410-001-15R	740	-	4000	8000	20	3xM10 (not included)
6	410-001-16R	1390	-	4000 (lower sheave) 2000 (upper sheave)	8000 (lower sheave) 4000 (upper sheave)	20	3xM10 (not included)

For more information about dimensioning, see page 98.