


# T w/ Socket (56-)

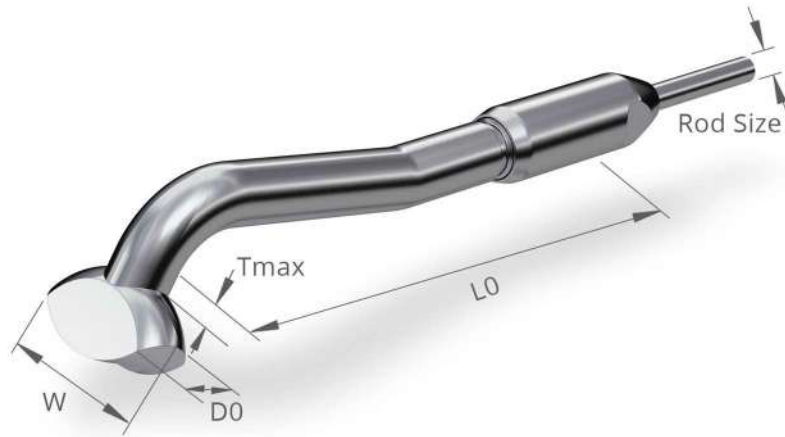

Article No	Rod Size		Thread Inch	W mm	D0 mm	L0 mm	Safe Work Load Kg	Break Load Kg	Weight Kg
	Dash	mm							
56516040	-3	4.0	5/16"-24 UNF	17.5	8.0	79.5	750	2025	0.055
56380045	-4	4.4	3/8"-24 UNF	20.5	9.0	88.5	1150	2675	0.071
56716050	-6	5.0	7/16"-20 UNF	31.5	12.7	109.5	1650	3380	0.170
56120050	-6	5.0	1/2"-20 UNF	31.5	12.7	105.5	1650	3380	0.185
56716057	-8	5.7	7/16"-20 UNF	31.5	12.7	109.5	1650	4340	0.169
56120057	-8	5.7	1/2"-20 UNF	31.5	12.7	105.5	1650	4340	0.184
56120060	-9	6.0	1/2"-20 UNF	31.5	12.7	105.5	1650	4690	0.183
56120064	-10	6.4	1/2"-20 UNF	32.5	14.0	112.0	2050	5395	0.182
56580071	-12	7.1	5/8"-18 UNF	34.5	16.0	124.0	2500	6570	0.349
56580075	-15	7.5	5/8"-18 UNF	34.5	16.0	124.0	2500	7435	0.350
56580080	-16	8.0	5/8"-18 UNF	39.0	18.0	130.0	2500	8210	0.348
56580084	-17	8.4	5/8"-18 UNF	39.0	18.0	130.0	2500	9130	0.347

Material: Acidproof Stainless Steel

For Socket outer diameter see under Socket (50-) same Dash Size