

Marlow[®] DATASHEET

EXCEL MARSTRON+

Excel Marstron has been upgraded in 2012 to Excel Marstron +. The rope now has a blended polypropylene and Dyneema cover to extend the abrasion resistance of the line through cleats and ratchet block.



Key Specifications:


Application:	Sheets, Floating Ropes
Material:	Polypropylene Core 16 Plait Polypropylene
Construction:	8 Strand Braided core construction 16 Plait Braided cover construction
Relative Density:	0.93 (Floats) Exact figure varies with diameter
Chemical Resistance:	Excellent resistance to most chemicals (additional information available on request)
Melting Point:	140°C
Critical Temperature:	80°C (exposure to temperatures over this will result in strength loss)

ELONGATION

Typical working elongation (for a bedded in a rope):

@ 10% of break load: 3.7%

@ 20% of break load: 5.3%

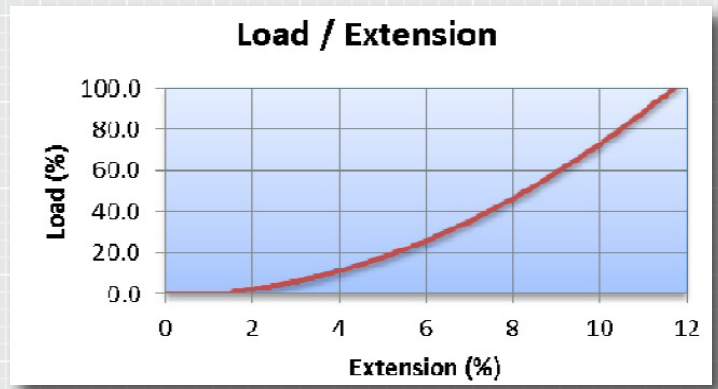

PERFORMANCE

DIAMETER	CIRCUMFERENCE	MASS		AVERAGE STRENGTH			MIN STRENGTH		
		mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg
6	7/32	18.1	1.21	650	1430	6.4	585	1287	5.7
7	1/4	21.2	1.42	1026	2257	10.1	975	2145	9.6
8	5/16	28.5	1.91	1092	2402	10.7	983	2163	9.6

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England
www.marlowropes.com

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Disclaimer
Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.

Certificate Number 315
ISO 9001
ISO 14001