




# PLAIN BEARING BLOCK 50

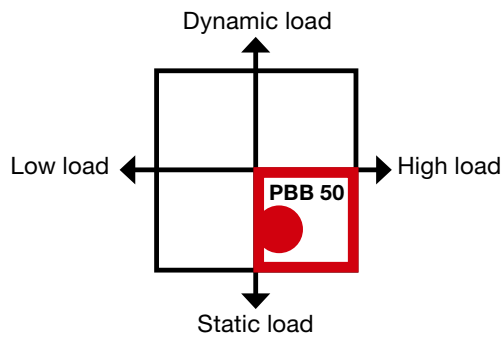

## TECHNICAL FEATURES PBB 50

- Acetal sheave.
- Stainless steel strap for strength and long service life.
- Stiff glass fibre reinforced cheeks to prevent lines from wedging.
- Glass fibre reinforced composite.
- Sliding swivel locking mechanism.

1



Single

2



Single becket

3



Single cam

4



Single becket cam

5



Double

6



Double becket

7



Triple

8



Triple becket

9



Triple cam

10



Triple becket cam

11



Fiddle

12



Fiddle becket

13



Fiddle cam

14



Fiddle becket cam

15



Cheek

16



Cheek R260

17



Cheek R40

18



Fiddle, twin-cam

For endless furling line used for Seldén CX and GX furling systems.

For more information about dimensioning,  
see page 94.

## PBB 50

	Art. No.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle/fasteners (Ø mm)
1	405-001-01R	113	700	1400	12	5
2	405-001-02R	129	700	1400	12	5
3	405-001-03R	195	120*	240	12	5
4	405-001-04R	212	240*	480	12	5
5	405-001-05R	217	700	1400	12	5
6	405-001-06R	233	700	1400	12	5
7	405-001-07R	292	700	1400	12	5
8	405-001-08R	306	700	1400	12	5
9	405-001-09R	426	600*	1200	12	5
10	405-001-10R	440	700	1400	12	5
11	405-001-11R	150	700	1400	12	5
12	405-001-12R	161	700	1400	12	5
13	405-001-13R	234	360*	720	12	5
14	405-001-14R	244	480*	960	12	5
15	405-001-15R	80	700	1400	12	3xM5 (not included)
16	405-001-16R	81	700	1400	12	3xM5 (not included)
17	405-001-17R	81	700	1400	12	3xM5 (not included)
18	405-001-40R	355	120*	240	10	405-040-01R

\* Safe working load based on cam cleat 433-201-01.