



BALL BEARING BLOCK 30

1



Single swivel/fixed

2



Single strap

3



Single swivel/ fixed, bucket

4



Double loop head

5



Double loop head bucket

6



Triple loop head bucket

7



Triple loop head bucket cam

8




Single tie-on

9



Single cheek cam

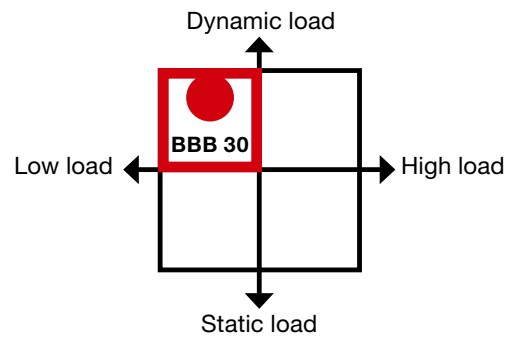

TECHNICAL FEATURES BBB 30

- Stainless steel ball bearing races, stainless steel ball bearings and Acetal sheave for best bearing strength even under high dynamic loads.
- Acetal bearing cage to prevent ball-to-ball friction and to reduce weight.
- Glass fibre reinforced composite.

10



Triple becket

11



Triple cam

12

Single swivel,
stand up

13



Single becket strap

14



Clew block

15

Sheet block, swivel
with slot. (Incl. in
403-101-12R and
System 15)

16



Single through deck

17



Single lead

18

Double through
deck

*The centre hole can be
used as a becket.*

**BBB 30**

	Art. No.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle/fasteners (Ø mm)
1	403-101-01R	33	200	400	8	4
2	403-101-02R	24	200	400	8	-
3	403-101-03R	35	200	400	8	4
4	403-101-04R	49	400	800	8	-
5	403-101-05R	52	400	800	8	-
6	403-101-06R	77	600	1200	8	-
7	403-101-07R	130	540*	1080	7	-
8	403-101-08R	21	200	400	8	-
9	403-101-09R	22	200	400	8	2xM4 (not included)
10	403-101-10R	79	600	1200	8	-
11	403-101-11R	126	450*	900	7	-
12	403-101-12R	30	200	400	8	2xM4 (not included)
13	403-101-13R	29	200	400	8	-
14	403-101-14R	68	200	400	8	Ring Ø35x5
15	403-101-16R	26	200	400	8	-
16	403-101-22R	24	200	400	8	2xM5 (not included)
17	403-101-23R	22	200	400	8	2xM5 (not included)
18	403-101-24R	44	200	400	8	2xM5 (not included)

* Safe working load based on cam cleat 433-101-01.