



PLAIN BEARING BLOCK 80



1



Single

2



Single becket

3



Double

4



Double becket

5




Triple

6



Triple becket

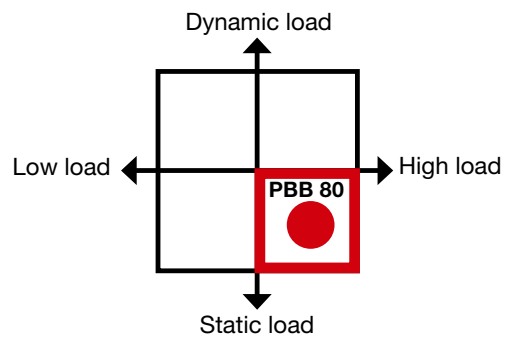

7



Fiddle

8



Fiddle becket

9



Single cheek

10



Double cheek

TECHNICAL FEATURES PBB 80

- Glass fibre reinforced sheave with polymer bushing.
- Bronze top swivel bushings.
- The shackle features a Ø 8 mm body and Ø 10 mm pin, a strong and lightweight combination.
- Stainless steel strap for strength and long service life.
- Stiff glass fibre reinforced cheeks to prevent lines from wedging.
- Glass fibre reinforced composite.
- Sliding swivel locking mechanism.

For more information about dimensioning, see page 94.



PBB 80 Triple

PBB 80

	Art. No.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle/fasteners (Ø mm)
1	408-001-01R	471	2000	4000	16	8/10
2	408-001-02R	524	2000	4000	16	8/10
3	408-001-05R	846	2000	4000	16	8/10
4	408-001-06R	901	2000	4000	16	8/10
5	408-001-07R	1154	2000	4000	16	8/10
6	408-001-08R	1204	2000	4000	16	8/10
7	408-001-11R	603	2000	4000	16	8/10
8	408-001-12R	638	2000	4000	16	8/10
9	408-001-15R	310	2000	4000	16	3xM8 (not included)
10	408-001-20R	628	2000 (lower sheave) 1000 (upper sheave)	4000 (lower sheave) 2000 (upper sheave)	16	3xM8 (not included)